

series oneDR

AC/DC Output Single Channel & AC Output Dual Channel

Crydoms SeriesOne DR Solid State Relays were developed to offer the advantages of Crydom's thermal management technology in a compact 11 & 18 mm wide IP20 housing with unique integrated heat sink. The SeriesOne DR provides a quick and easy installation onto any standard 35 mm DIN rail profile paired with high output power ratings.


FEATURES

- Single channel 6 & 12 Amps output power rating
- Two independent 6 Amp channels in dual channel versions
- Single channel 60 & 100 VDC, 24 to 600 VAC operating voltage ratings
- Dual channel 24 to 600 VAC operating voltage ratings
- 4-32 VDC, 24, 120 & 230 VAC control input options available for single channel versions
- 4-32 VDC control input for dual channel versions
- AC Output versions with Zero Voltage Turn-On for resistive loads and Random Turn-On for inductive loads
- LED indicates only Input status. Does not represent Output status.

INSTALLATION INSTRUCTIONS


Please read all installation instructions before using SeriesOne DR SSRs.

- Install the relay on the DIN rail (as shown in drawing)
- Wire the relay to the input side. 22 AWG minimum, 16 AWG maximum
- Wire the relay to the output side. 22 AWG minimum, 14 AWG x 2 or 12 AWG x 1 (standed/solid) maximum
- Maximum recommended terminal screw torque input 4.4 in/lbs (0.5 Nm) & output 7.0 in/lbs (0.8 Nm)
- If multiple units are installed be sure to follow derating curves (reverse side of this sheet)

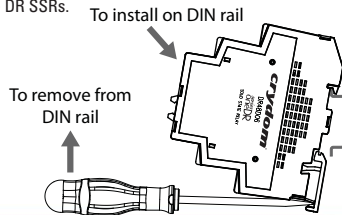


PART NUMBER NOMENCLATURE

Single Channel ^(A)

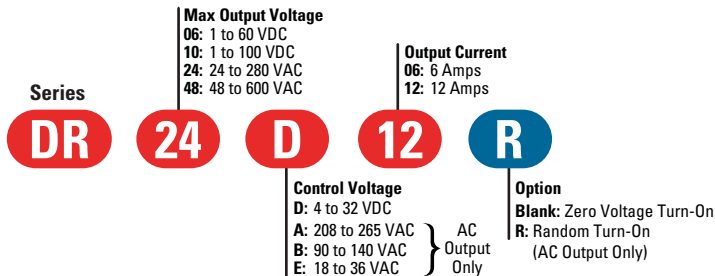

Dual Channel

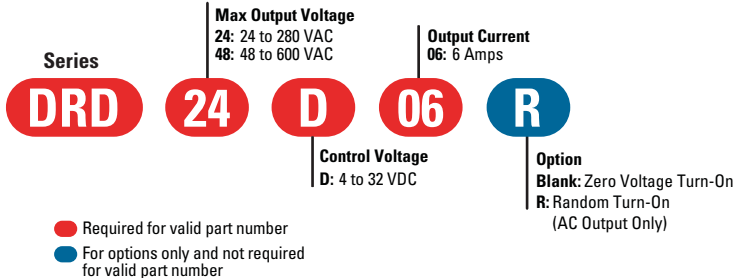

(A) Not all combinations of ratings are available.


Rev: 072310

Do not forget to visit us at: www.crydom.com


Copyright © 2011 Crydom Inc. Specifications subject to change without notice.

WIRING DIAGRAMS ^(B)

For DRxxx06 or DRxxx12 versions

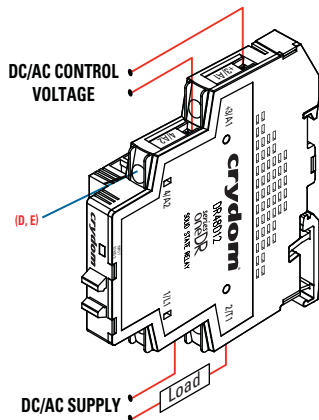

For DRDxxD06 versions

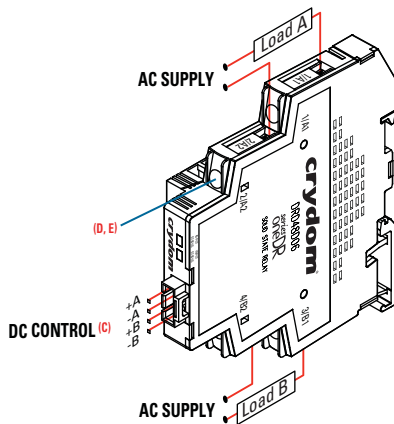

- (B) No grounding wire required. DC inductive loads must be diode suppressed.
- (C) 4 Pin connector for dual channel output only. Matting connector: MOLEX 050579404 or equivalent.
- (D) 4 Terminal screws Pozidriv #1, 3/16 in [4.8 mm].
- (E) Minimum wire strip length 0.20 in [5.1 mm], maximum 0.28 in [7.1 mm].

⚠ WARNING

RISK OF MATERIAL DAMAGE AND HOT ENCLOSURE

- The product's side panels may be hot, allow the product to cool before touching.
- Follow proper mounting instructions including torque values.
- Do not allow liquids or foreign objects to enter this product.

Failure to follow these instructions can result in serious injury, or equipment damage.

⚠ DANGER


HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Turn off power supply before working on this equipment.


Failure to follow these instructions will result in death or serious injury.

DERATING CURVES

DRxxx06

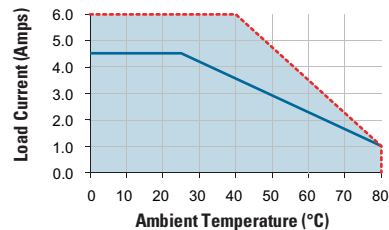

DRxxx12 & DRDxxD06

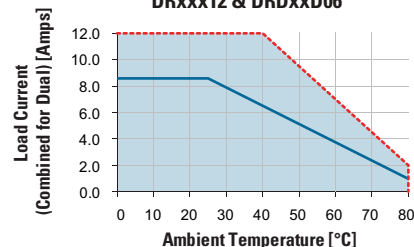

- Installed single unit, distance to adjacent components ≥ 11 mm for DRxxx06 and ≥ 18 mm for DRxxx12 & DRDxxD06
- Multiple units, no minimum spacing between components

Rev: 072310